

HVAC/R
Service Products



Combi

3004046



7 640154 082281

Condensate Pump

Kondensatpumpe
Pompe de relevage de condensats
Pompe acqua condensa
Bomba de condensado



Quiet mode:

Installer configurable pump performance using dip-switches to optimize each individual installation for the best performance and sound parameters.



Diagnostic LED:

Patented two color long-life LED to ensure correct initial installation and to assist in diagnostics on future service calls.



USB connection:

Patented access for wholesalers or installing contractors to review pump history.



Digital sensor:

Unique digital water level sensor with no moving parts to get stuck or clogged.



Universal application:

Widest application range for interior/exterior mount pumps in the market from 6,000 Btu/H to 120,000 Btu/H (1.75kW to 35kW).






Integrated replaceable 10 A fuse:

Factory installed replaceable 5 × 20mm 10A fuse

COMBI

SZWAJCARSKA POMPKA SKROPLIN

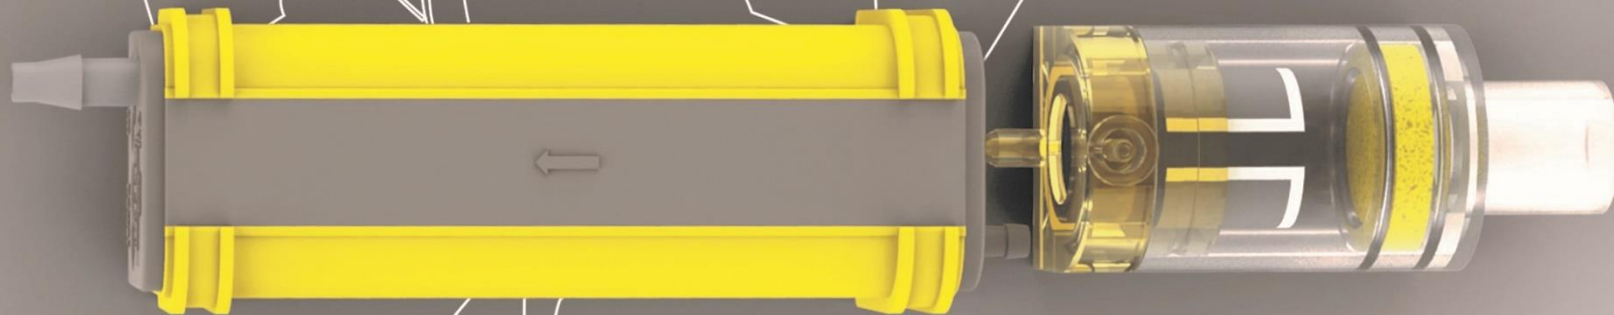

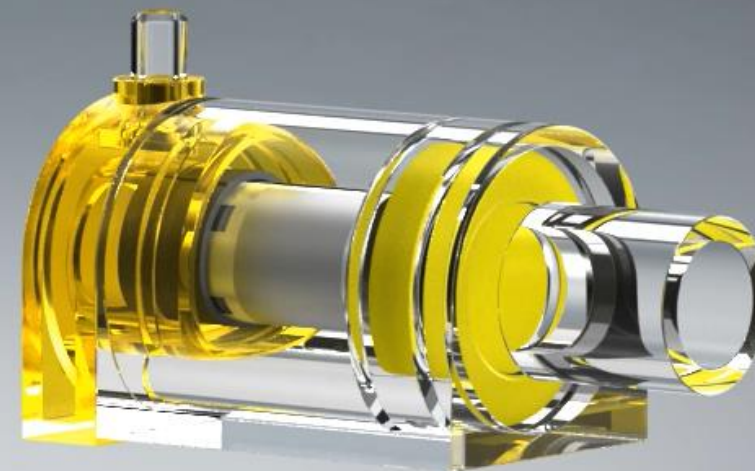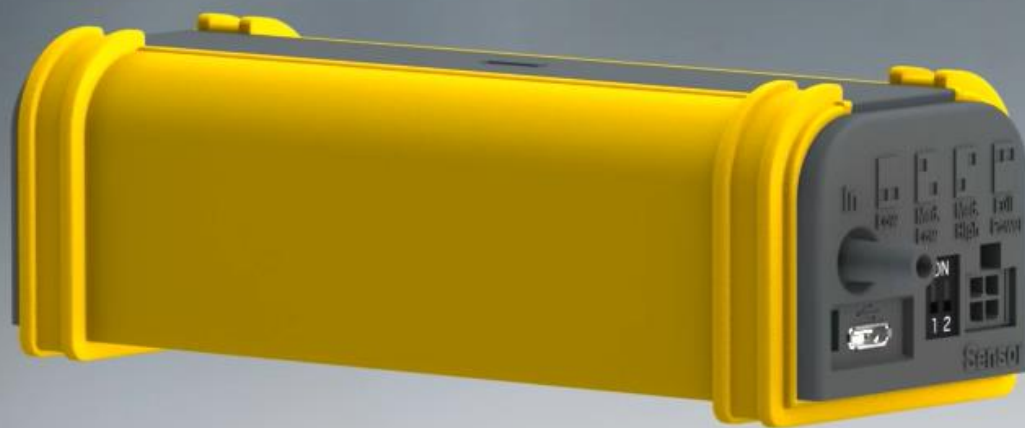

**JEDNA POMPA PASUJĄCA
DO WSZYSTKICH POTRZEB**

Uniwersalna Pompka Skroplin

HVAC/R
Service Products



Wbudowane zabezpieczenie
Montowany fabrycznie i
wymieny bezpiecznik
10 A (5 x 20 mm)



Cyfrowy czujnik
Unikalny elektroniczny
sensor poziomu wody
kondensacyjnej



Dioda diagnostyczna
LED potwierdzający
prawidłową instalację
i ułatwiający diagnozę
usterek



Wbudowane oprogramowanie
Złącze micro-USB umożliwiające
podgląd daty instalacji i historii pracy



**Regulowana
wydajność**
4 tryby pracy
dopasowane do
klimatyzatorów od
1,75 kW do 35 kW
mocy chłodniczej



Bezszelestna praca
Poziom dźwięku poniżej 19 dB
w najniższym trybie pracy




WSZECHSTRONNE ZASTOSOWANIE OD 1,75 DO 35 kW MOCY CHŁODNI- CZEJ

4 WYDAJNOŚCI DO 42 L/H




BEZSZELESTNA PRACA (19 dB)

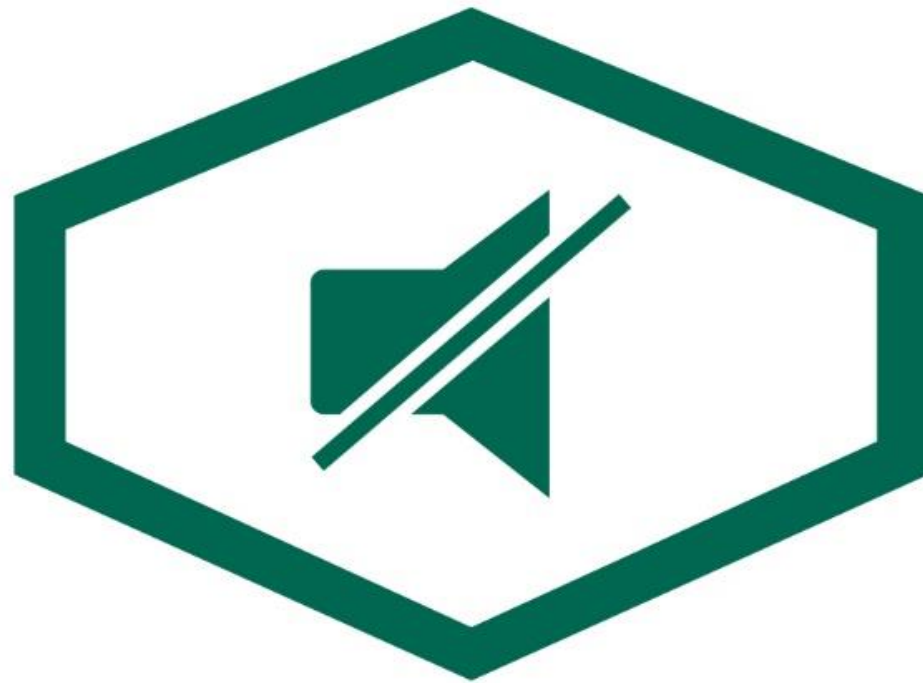




**BEZPŁYWAKOWY
CZUJNIK SKROPLIN**

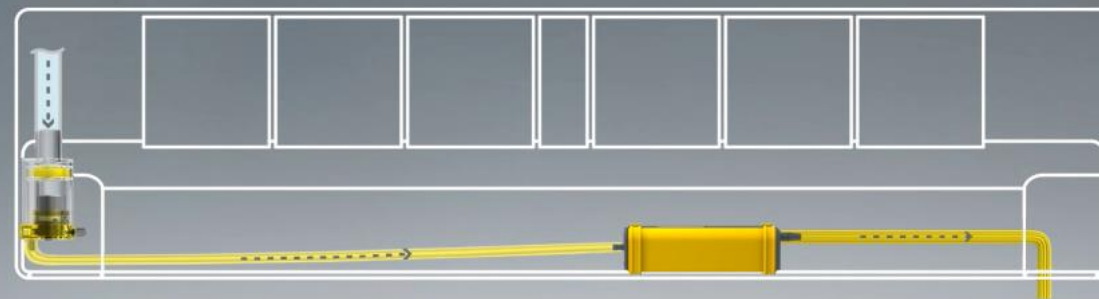

Water sensor vertical and pump in the AC unit




MONTAŻ BEZ OGRANICZEŃ

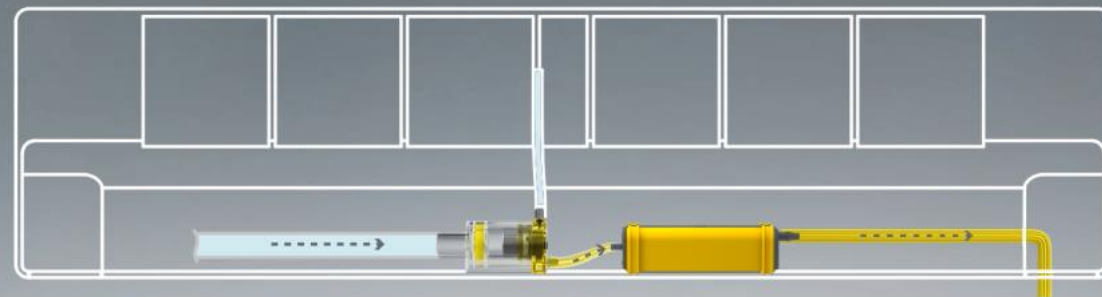

Water sensor and pump next to each other




MONTAŻ BEZ OGRANICZEŃ

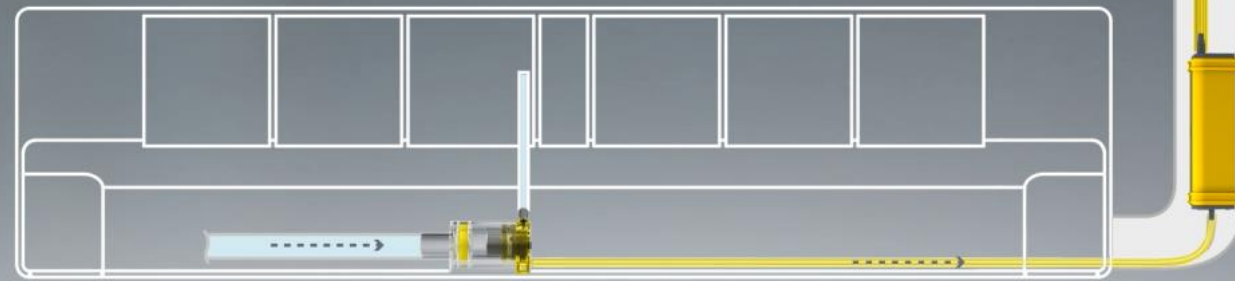

Water sensor in the AC unit and pump outside




MONTAŻ BEZ OGRANICZEŃ

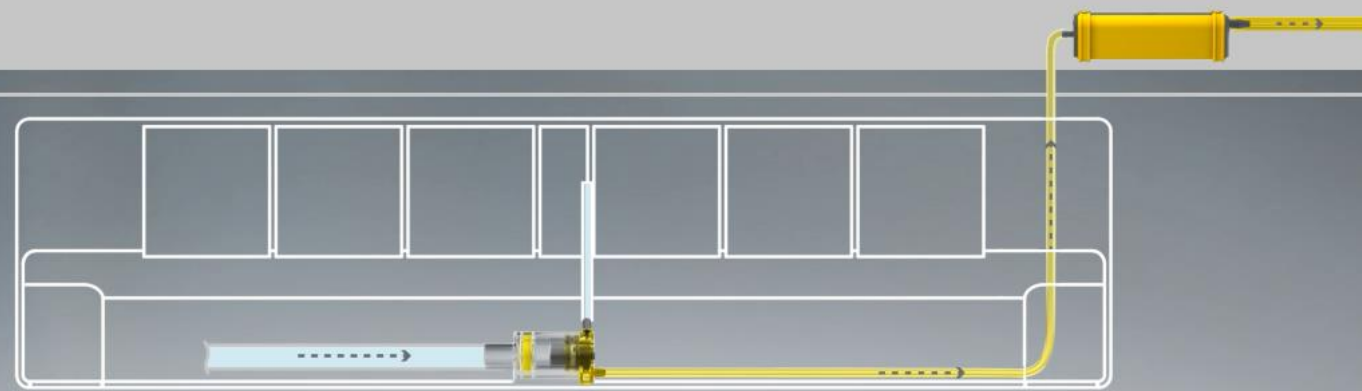


Water sensor in the AC unit, pump in the ceiling



MONTAŻ BEZ OGRANICZEŃ

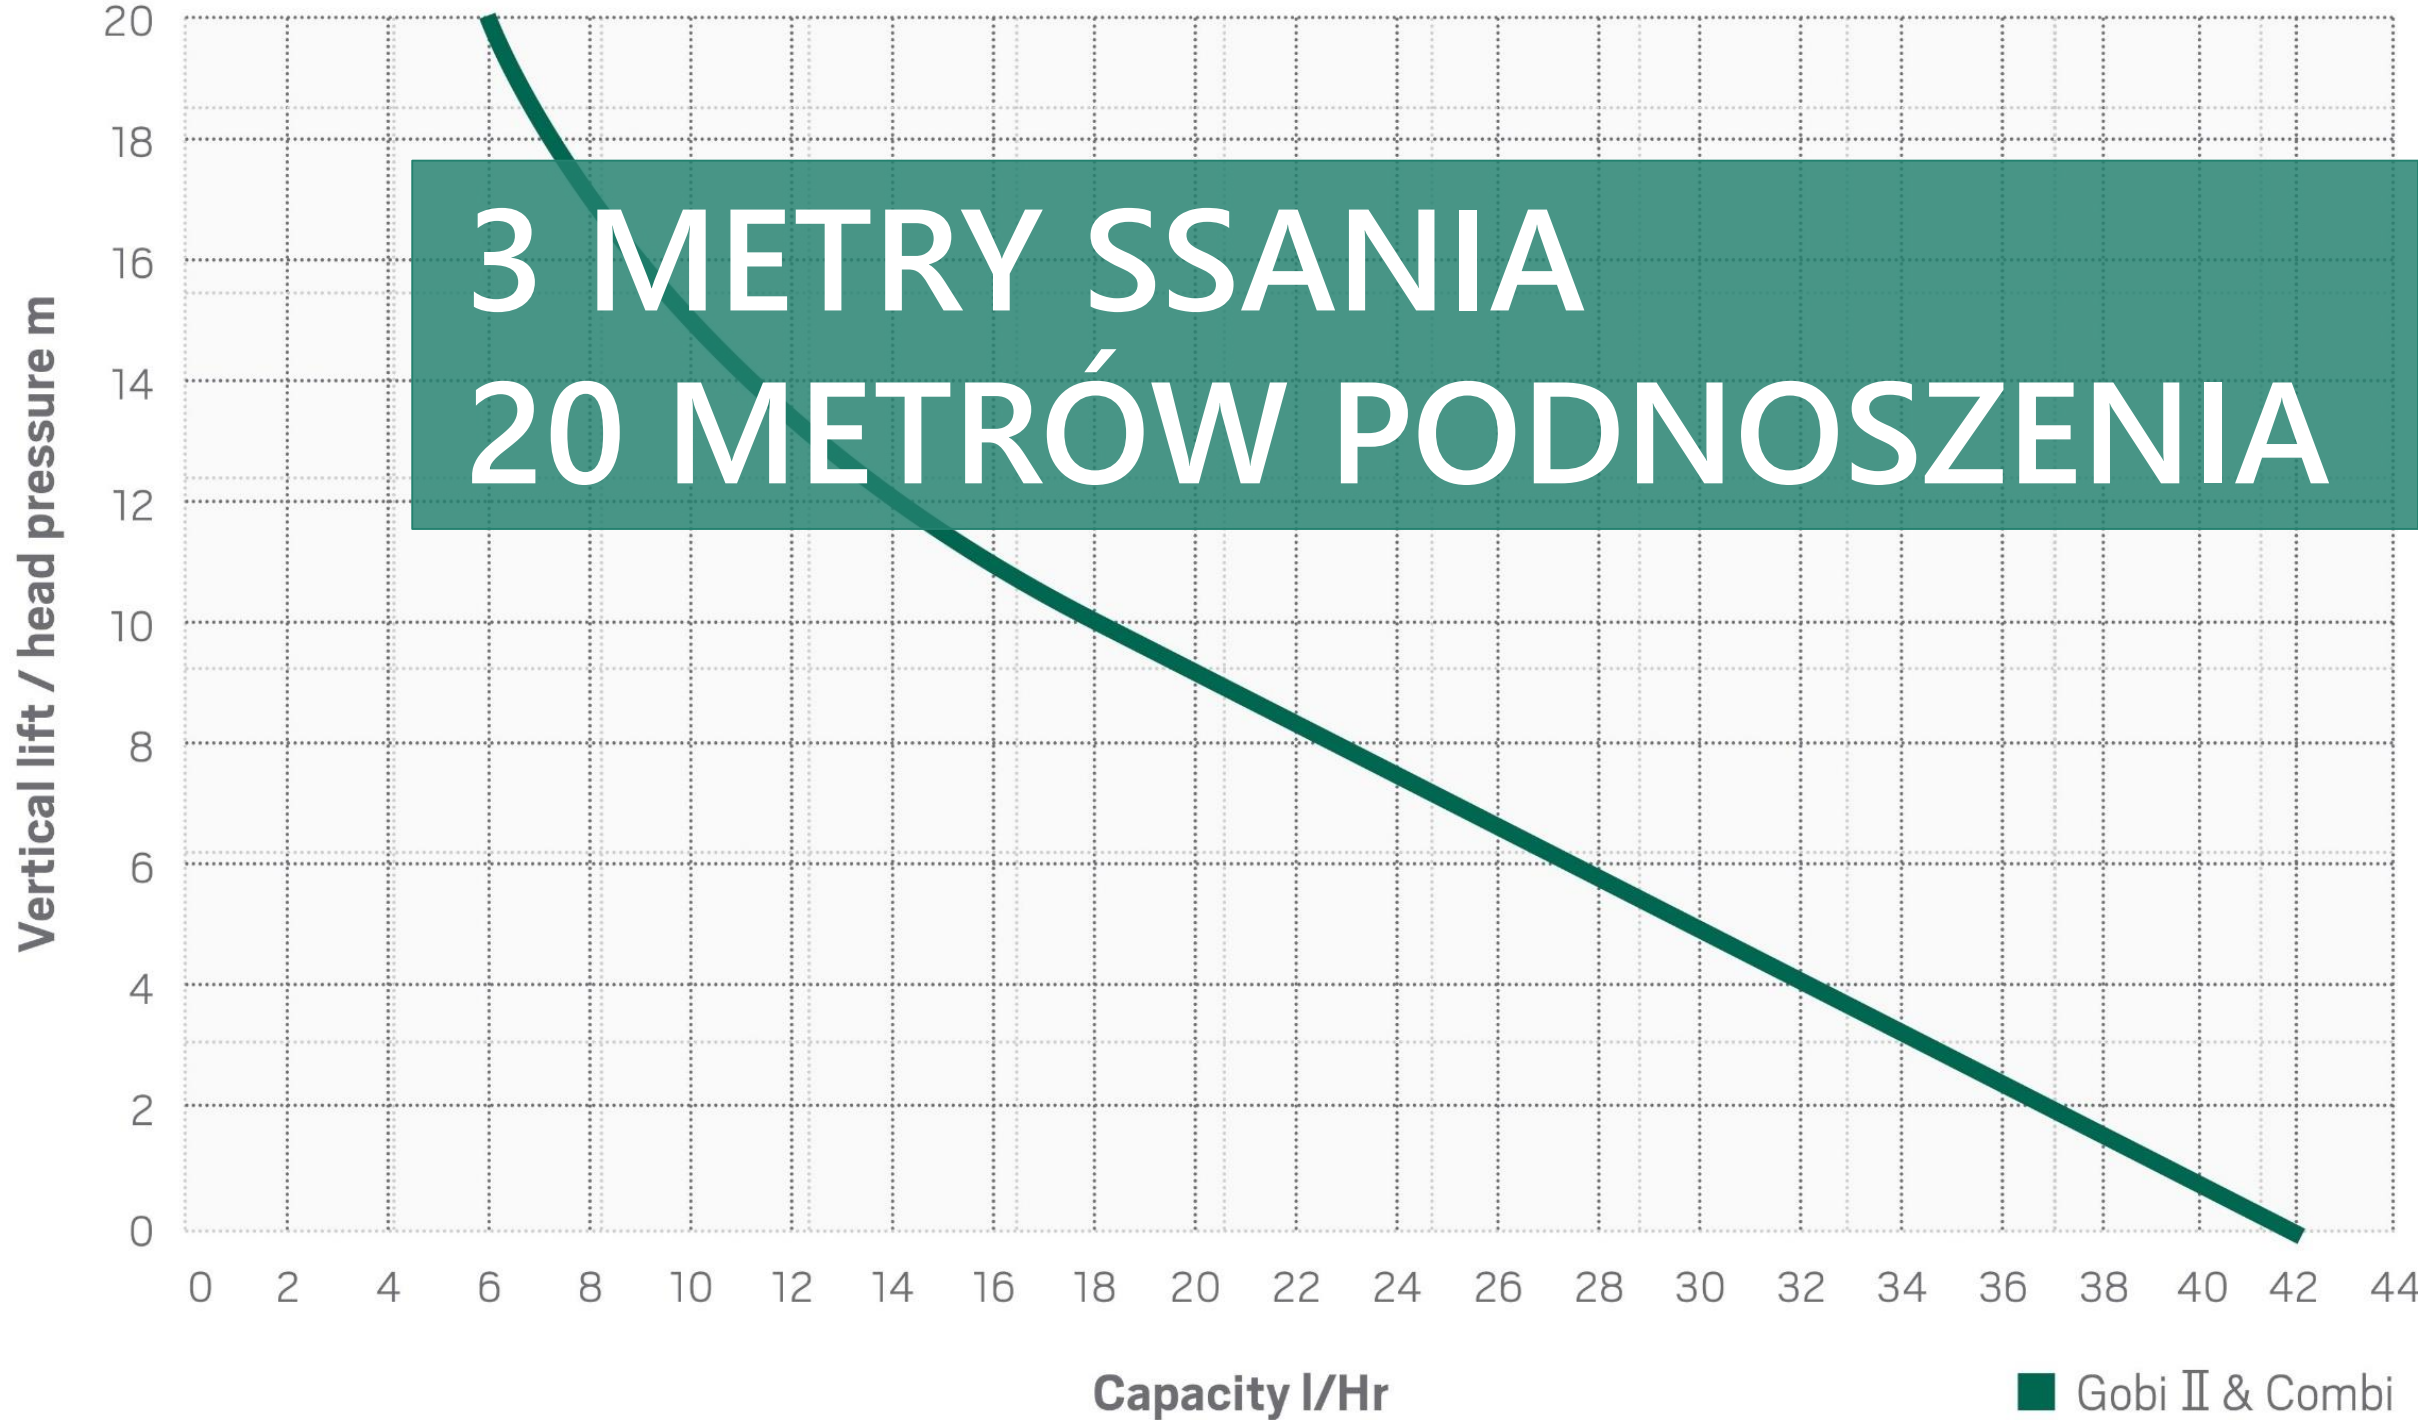

LED indications in operation

No power		Pump is miswired or no incoming voltage. Problem with A/C system or alarm is miswired.
Start up LED sequence (default mode)		Alternating red/ green flashes 5x only then stops and goes to standby mode.
or Start up LED sequence (peripheral mode)		Alternating red/ green flashes 5x only then stops and goes to standby mode.
Standby mode - waiting for water		Blinking green continuously.
Pumping water		Solid green. Running in low, med low, med high, or high power config. normal operation.
High water level mode		Blinking red. Running above high water level.
Alarm mode - relay activated		Solid red. Pump cannot keep up with water input. To prevent water overflow break power to A/C until water level reduces.
Reconfigure code		Pump has had 3 extra long run cycles, reconfigure dip- switches for more capacity.

WBUDOWANA DIAGNOSTYKA



ZDALNE ROZPATRYWANIE REKLAMACJI

2 LATA GWARANCJI OD INSTALACJI

Serial Number

9K0440238

Manufactured Date (DD-MM-YYYY)

19-09-2018

Installation Date (DD-MM-YYYY)

30-01-2019

Number of Pumping Cycles (ON/OFF)

1

Total Pumping Operation Time (Minutes)

0

Number of Days Pump Cycled (Min 1x)

1

Number of ALARM Relay Activations

1

Total Time in ALARM (Minutes)

0

ALARM Relay Operation

Default

Total Powered Time (Minutes)

5


COM Port Selection

USB Serial Device (COM3)

Save To File

Current Capacity Settings

LOW (1 = OFF 2 = OFF)

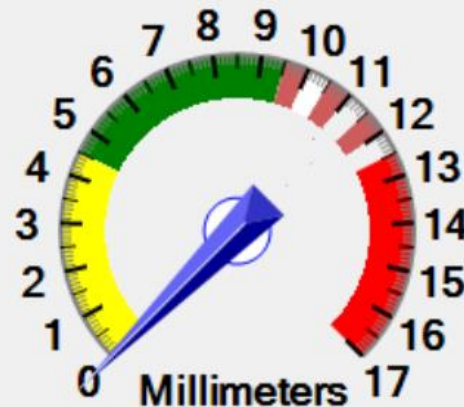

WYPRODUKOWANA W NIEMCZECH

FOR INDOOR USE ONLY /
POUR UNE UTILISATION EN
INTERIEUR UNIQUEMENT /
NOT SUBMERSIBLE

RECOGNIZED
COMPONENT



Intertek

5012973



Conforms to UL Std. UL 778 &
Certified to CSA Std. C22.2 #108

REFCO Manufacturing Ltd
CH - 6285 Hitzkirch
Switzerland

www.condensate-pumps.com

Made in Germany

GOBI MONTAŻ ZEWNĘTRZNY



GOBI MONTAŻ ZEWNĘTRZNY

